


SHOWER
Exposed Thermostatic Shower
System (Rough & Trim)
CD1.01

GRAFF[®]

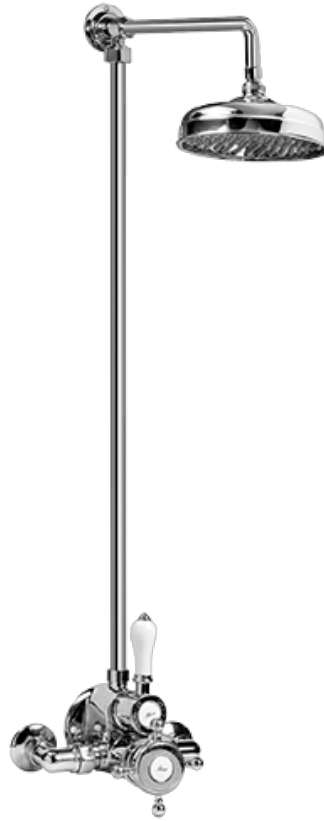

Information

- Showerhead, 12" Shower Arm, Flange
- Flow rates: showerhead \leq 1.8 max gpm
- ADA
- CALGreen

SHOWER
Traditional 8" Showerhead
G-8410

GRAFF®



Information

- Sunflower shape
- 112 no-clog, easy-clean rubber spray nozzles
- Metal ball-joint allows for showerhead angle adjustment
- Showerhead flow rate ≤ 1.8 max gpm
- Recommend use with ceiling shower arm
- Recommended for use at no more than 10 degrees tilt
- CALGreen

Finishes



Olive Bronze



Polished
Chrome




Polished
Nickel



Steelnox®
(Satin Nickel)

G-8410

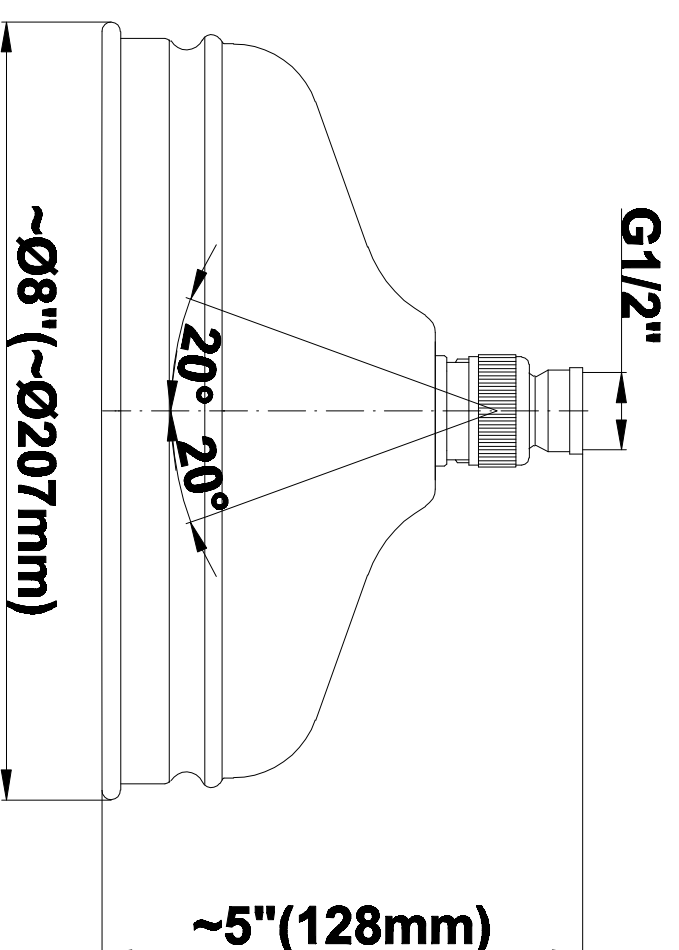

SHOWER
Exposed Thermostatic Valve
G-8900

GRAFF®



Finishes



Olive Bronze



Polished
Chrome





Polished
Nickel



Steelnox®
(Satin Nickel)

G-8900

Exposed Thermostatic Valve

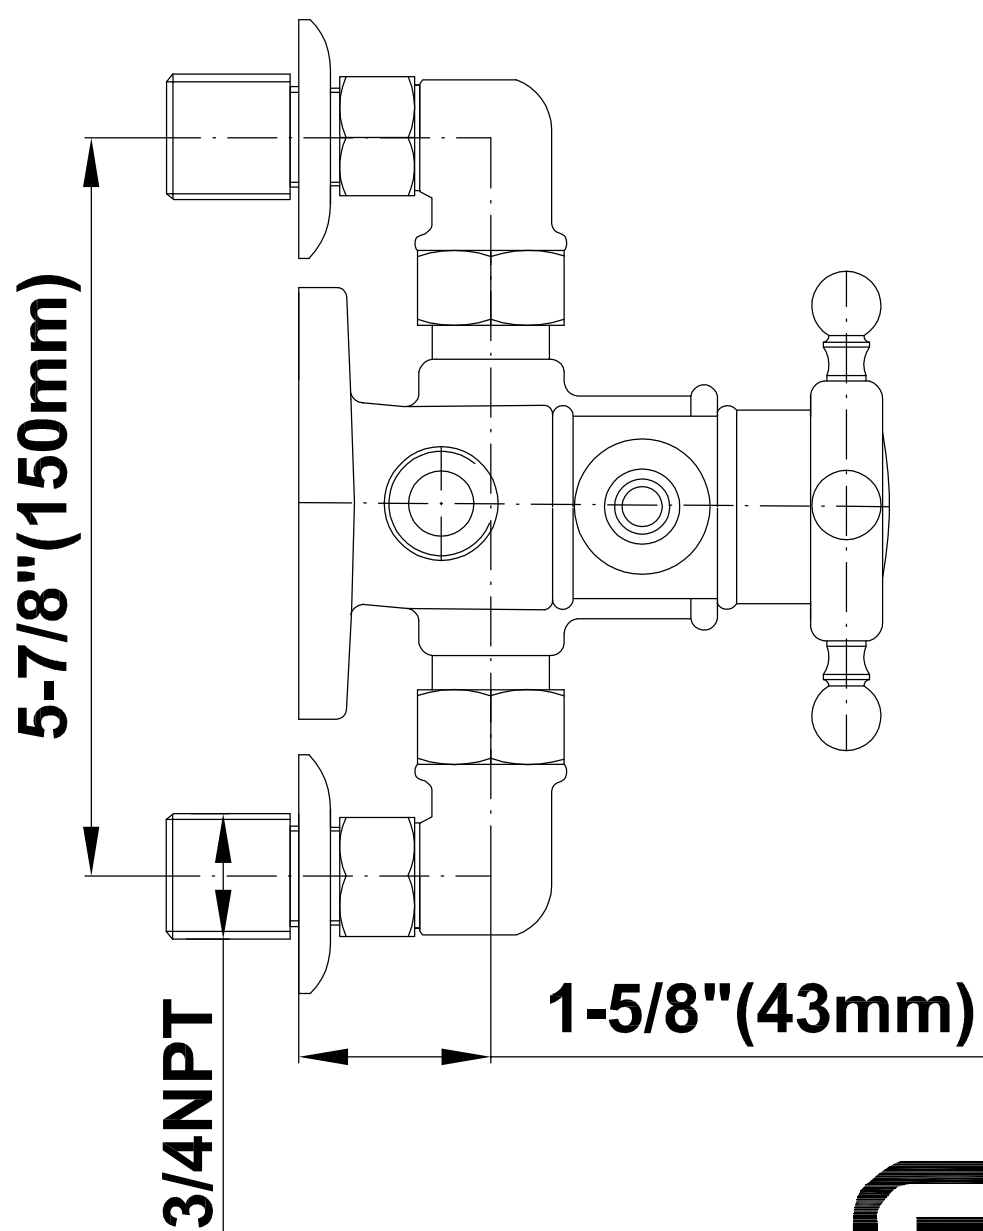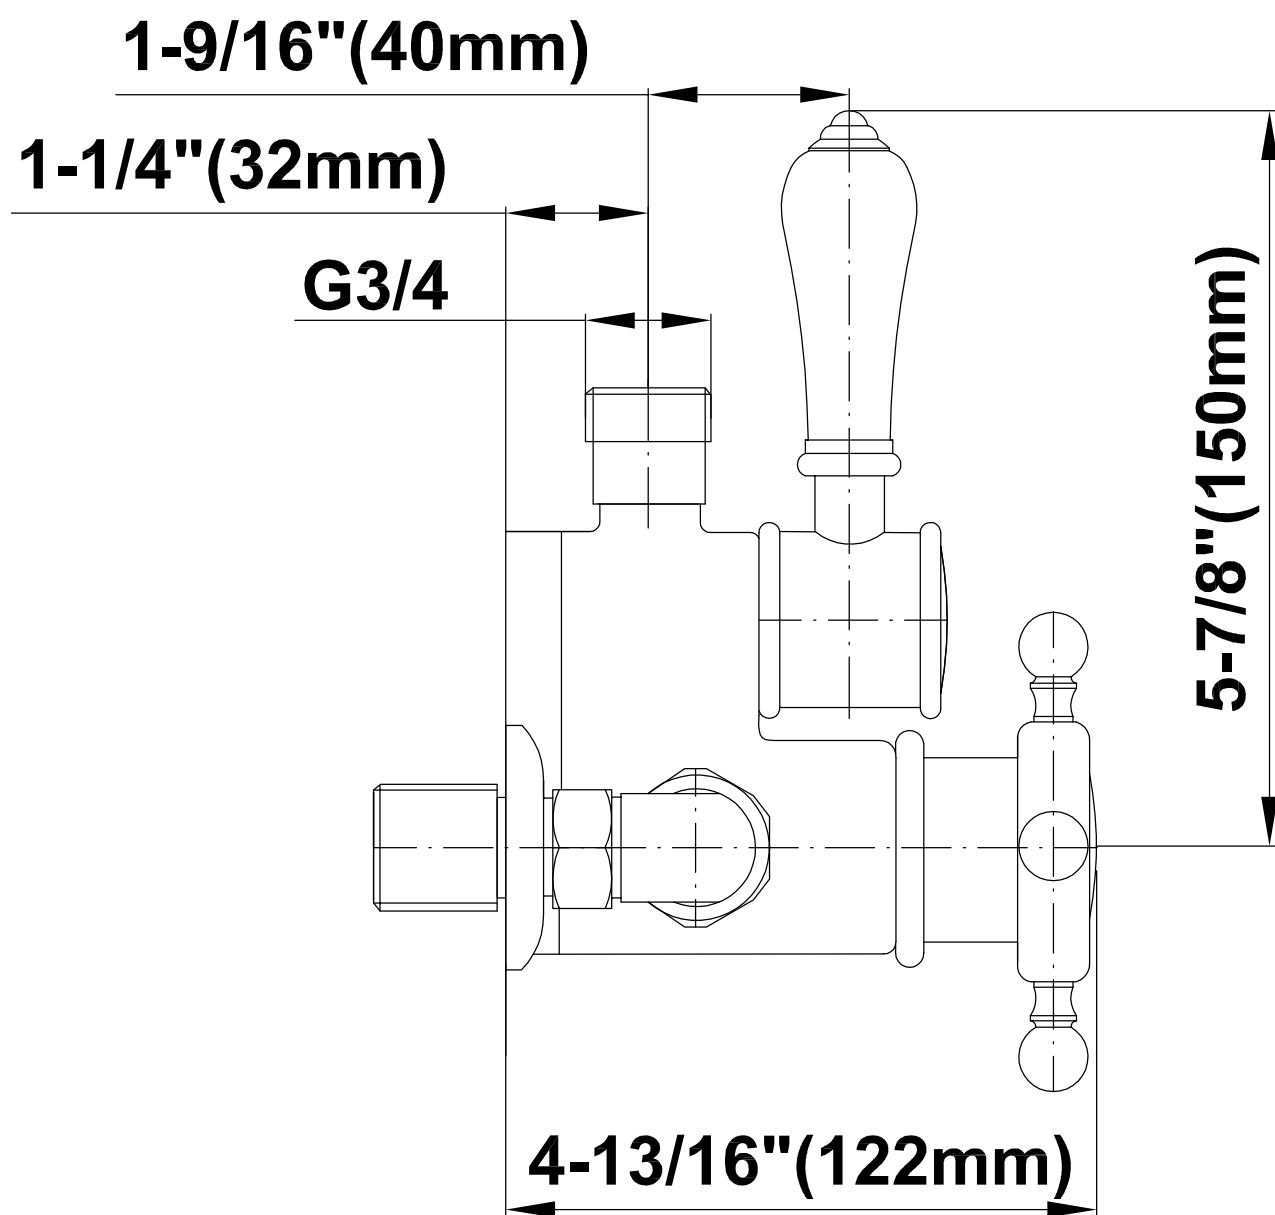

SHOWER
Exposed Riser
G-8931

GRAFF®



Finishes



Olive Bronze



Polished
Chrome



Polished
Nickel



Steelnox®
(Satin Nickel)

G-8931

Exposed Riser

