### **AETHER 2"-** Round Adjustable Trimless

R2ARAL

## WAC LIGHTING

Responsible Lighting®



<b>PROD</b>	UCT	DES	CRIP	TION

Shallow housing that is designed to fit in tight plenum spaces without sacrificing lumen output.

#### **FEATURES**

- · Designed to fit in tight plenum
- · Wet location listed for trims
- 2" trim aperture, 2" housing height
- Universal input voltage (120V-277V)
- 5 year WAC Lighting product warranty
- 0-25° vertical and 365° horizontal adjustment

Fixture Type:	
Catalog Number:	
Project:	
Location:	

#### **SPECIFICATIONS**

**Construction:** Die-cast aluminum trim with die-cast aluminum heat sink

**Dimming:** 100% - 5% with 0-10V

100% - 5% with Electronic Low Voltage (ELV)/TRIAC

Input: 120V-277V AC

Power: 15W, power factor 0.98

Mounting: Retention clips firmly hold trim to housing.

Finish: Powder coated white, black, enamel coated haze, electroplated brushed

nicke

**Standards:** UL & cUL Listed, wet location listed trims, Title 24 JA8-2016

Compliant

Ceiling thickness: ½" - 1"


TRIM (SEE NEXT PAGE FOR HOUSING)		Beam	Color Temp		CRI	Lumen	CBCP	Finish	Interior/Trim
	→ 2 <sup>5</sup> ″ →	<b>N</b> 22°	827 830 835 840 927 930	2700K 3000K 2700K 4000K 2700K 3000K	85 85 85 85 90	1295 1365 1390 1405 1080 1120	3560 3745 3820 3858 2968 3078	HZ WT BK BN	Haze White Black Brushed Nickel
<b>R2ARAL</b> Round	5½"  5½  5½  5½  5½		827 830 835 840 927 930	2700K 3000K 2700K 4000K 2700K 3000K	85 85 85 85 90	1270 1335 1360 1375 1055	1943 2044 2085 2105 1620 1680	HZ WT BK BN	Haze White Black Brushed Nickel

### **AETHER** - Housing

### HR-2LED-H13A

# **WAC LIGHTING**

Responsible Lighting®

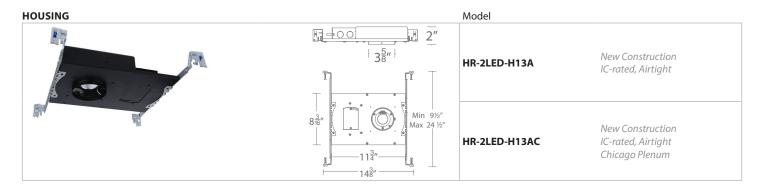

HR-2LED-H13\_\_\_\_

Example: HR-2LED-H13A