

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

## Volo

### Pendant 3000K

Model & Size	Color Temp & CRI	Watt	LED Lumens	Delivered Lumens	Finish
PD-22744 44"	3000K 90	24W	1299	1034	AL Brushed Aluminum BK Black

Example: **PD-22744-AL**

- For 277V special order, add an "F" before the finish: PD-22754F-AL

#### DESCRIPTION

Wishful lighting. Ultra thin pendant for the discerning minimalist.

#### FEATURES

- Ultra thin pendant for the discerning minimalist
- Frosted diffuser provides even illumination
- Cable suspension carrying low voltage may be field shortened
- 0-10V dimming not available for PD-22775
- Driver concealed within the canopy
- 5 Year warranty


#### SPECIFICATIONS

Color Temp:	3000K
Input:	120-277 VAC, 50/60Hz
CRI:	90
Dimming:	ELV: 100-10%, 0-10V: 100-5%, TRIAC: 100-5%
Rated Life:	54000 Hours
Standards:	ETL, cETL, Title 24: 2019, Energy Star 2.0
	Damp Location Listed
Construction:	Aluminum hardware with polycarbonate diffuser

#### FINISHES



#### LINE DRAWING

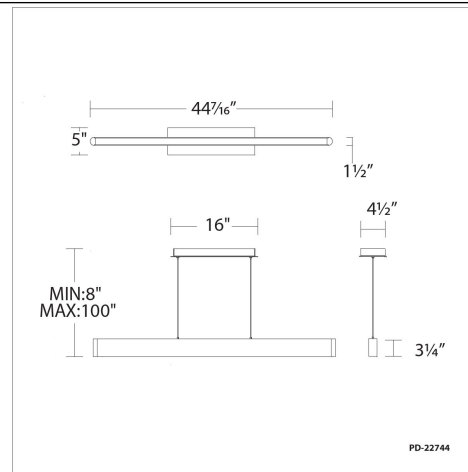

# WAC LIGHTING

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

## Volo

### Pendant 3000K

Model & Size	Color Temp & CRI	Watt	LED Lumens	Delivered Lumens	Finish
PD-22754 54"	3000K 90	30W	2150	1740	AL Brushed Aluminum BK Black

Example: **PD-22754-AL**

- For 277V special order, add an "F" before the finish: PD-22754F-AL

#### DESCRIPTION

Wishful lighting. Ultra thin pendant for the discerning minimalist.

#### FEATURES

- Ultra thin pendant for the discerning minimalist
- Frosted diffuser provides even illumination
- Cable suspension carrying low voltage may be field shortened
- 0-10V dimming not available for PD-22775
- Driver concealed within the canopy
- 5 Year warranty

#### SPECIFICATIONS


Color Temp:	3000K
Input:	120-277 VAC, 50/60Hz
CRI:	90
Dimming:	ELV: 100-10%, 0-10V: 100-5%, TRIAC: 100-5%
Rated Life:	54000 Hours
Standards:	ETL, cETL, Title 24: 2019, Energy Star 2.0
	Damp Location Listed
Construction:	Aluminum hardware with polycarbonate diffuser



#### FINISHES



#### LINE DRAWING

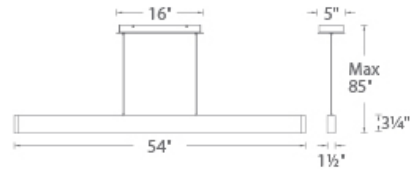

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

## Volo

### Pendant 3000K

Model & Size	Color Temp & CRI	Watt	LED Lumens	Delivered Lumens	Finish
PD-22775 75"	3000K 90	44W	2671	1888	AL Brushed Aluminum BK Black

Example: **PD-22775-AL**

- For 277V special order, add an "F" before the finish: PD-22754F-AL

#### DESCRIPTION

Wishful lighting. Ultra thin pendant for the discerning minimalist.

#### FEATURES

- Ultra thin pendant for the discerning minimalist
- Frosted diffuser provides even illumination
- Cable suspension carrying low voltage may be field shortened
- 0-10V dimming not available for PD-22775
- Driver concealed within the canopy
- 5 Year warranty

#### SPECIFICATIONS

Color Temp:	3000K
Input:	120-277 VAC, 50/60Hz
CRI:	90
Dimming:	ELV: 100-10%, 0-10V: 100-5%, TRIAC: 100-5%
Rated Life:	54000 Hours
Standards:	ETL, cETL, Title 24: 2019, Energy Star 2.0
	Damp Location Listed
Construction:	Aluminum hardware with polycarbonate diffuser



#### FINISHES



#### LINE DRAWING

