

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Charge 8020

16W H/J/L Track Luminaire

System Type & Voltage	Model	Color Temp & CRI	Lumens	CBCP	Finish
H 120 VAC J 120 VAC L 120 VAC	8020	30 3000K - 90	1280	1402	BK Black BN Brushed Nickel DB Dark Bronze WT White

Example: **H-8020-30-BK**

DESCRIPTION

The Charge 8020 track luminaire offers superior light output in a small, unobtrusive design. Developed for residential spaces and lower-mounted commercial applications.

FEATURES


- 350° horizontal and 90° vertical aiming
- Driver concealed within the fixture
- 5 year warranty

SPECIFICATIONS

Construction:	Die-cast aluminum with frosted TIR lens
Power:	16W
Input:	120 VAC, 50/60Hz
Dimming:	ELV: 100-5% , TRIAC: 100-5%
Light Source:	Integrated LED 3 Step Mac Adam Ellipse
Lens:	Frosted TIR Lens
Rated Life:	50000 Hours
Finish:	Electrostatically Powder Coated:Black, Electrostatically Powder Coated::Dark Bronze, Electrostatically Powder Coated:::White, Electrostatically Powder Coated::::Brushed Nickel
Operating Temp:	-4°F to 104°F (-20°C to 40°C)
Standards:	ETL, cETL, Dry Location Listed, Energy Star 2.0, Title 24 JA8-2019 Compliant



FINISHES:

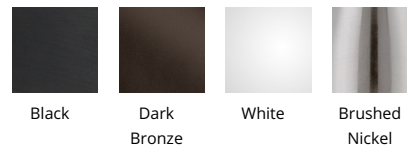

LINE DRAWING:

